

DATA SHEET

SUPERDIE™

~ W.Nr. 1.2367 - X38CrMoV5-3

HOT WORK TOOL STEEL



Finkl Steel

TYPICAL APPLICATIONS

- Tooling for Die Casting
- Aluminum and magnesium extrusion dies
- Die inserts and forging dies
- Plastic Mold Dies
- Cores, sleeves and slides

GENERAL

Delivery Condition:

Annealed to 235 BHN Max
EFVD, ESR or VAR

Non-NADCA: **SuperDie™**

NADCA Grade C: **SuperDie™ XFS ESR or VAR**

SuperDie™ exhibits higher strength and surface hardness at room temperature than H13 and H11 type alloys when tempered at identical tempering temperatures.

SuperDie™ also resists softening at elevated operating temperatures better than H13 and H11 (see figure). The high temperature strength and tempering resistance. Its balanced composition allows **SuperDie™** to be higher toughness than standard 1.2367.

Typical Chemical Analysis - % weight

C	Mn	Si	Cr	Mo	V
0.35	0.45	0.25	5.05	2.40	0.55

SuperDie™ has an excellent combination of high strength and toughness and can reach hardnesses typically in the 42 to 52 HRC with standard hardening procedures by most vacuum heat treating operations.

SuperDie™ is forged using a special densifying process which assures optimum consolidation of centers.

SuperDie™ is forged on our largest presses equipped with wide dies assuring maximum deformation during forging process.

SuperDie™ is characterized by :

- Improved wear resistance
- Improved temper resistance
- Improved fracture toughness
- High temperature strength
- High impact resistance

SuperDie™ is 100% ultrasonic tested to very high standards. It is defect free.

SuperDie™ can be supplied pre-certified to NADCA standard #207 Grade C (**SuperDie™ XFS ESR or VAR**) on request.

™ Finkl Steel Trademark

DATA SHEET

HOT WORK TOOL STEEL

SuperDie™

HEAT TREATMENT

ANNEALING

Temperature: 1500-1550°F (815-845°C)
Rate of cooling: 25°F (15°C) max per hour

Annealed hardness: 235 BHN Max.

Key parameters of the NADCA recommended procedure for hardening dies for die casting service are:

HARDENING

Rate of heating: slow
Preheat Temperature: 1200-1300°F (650-705°C)
Hardening Temperature: 1850-1885°F (1010-1030°C)
Time at temperature: 30-45 minutes
Quenching to 300°F (150°C)

TEMPERING

Tempering Temperature: 1050°F (565°C) minimum


STRESS RELIEVING

Temperature: 50-100°F (30-55°C) below final tempering temperature and slow cool to 875°F (470°C), then air cool.

Note: Provided technical data and information in this data sheet are typical values. Normal variations in chemistry, size and conditions of heat treatment may cause deviations from these values. We suggest that information be verified at time of enquiry or order. For additional data or metallurgical assistance, please contact us.

SIZE SuperDie™ (Finished / approx.)

Max weight	16 330 kg	36 000 lbs
Max section	0.90 m ²	1 400 sq in
Max width	1 270 mm	50"
Max thickness	760 mm	30"

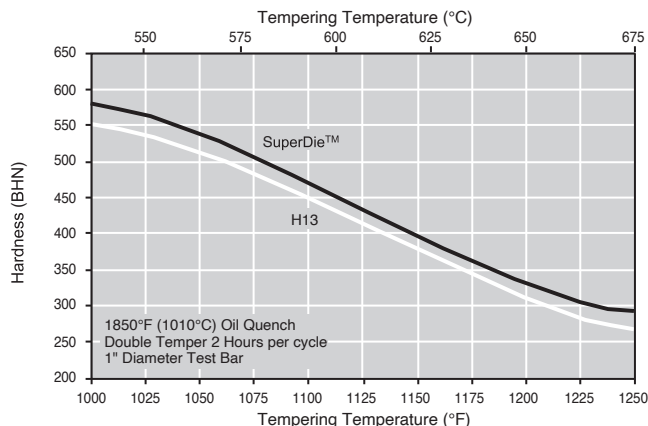

FINKL STEEL offers select customers the opportunity to participate in the Finkl Partner Program, a Web-based system that allow for:

- Online quoting and ordering
- Real-time order tracking
- Customized report generation

Contact your Finkl representative to learn more about online business services.

Finkl Steel—Chicago
1355 E. 93rd Street
Chicago, IL 60619
773.975.2510
TOLL-FREE: 800.621.1460

Finkl Steel—Sorel
100 McCarthy Street St-Joseph-de-Sorel Quebec,
Canada J3R 3M8
450.746.4122
TOLL-FREE: 800.363.9484

Finkl Steel—Composite
2300 W. Jefferson Avenue
Detroit, MI 48216
313.496.8599
TOLL-FREE: 800.521-0520

www.finkl.com



Finkl Steel